


Screw clamping terminal block-UKJ-2.5 - 011001

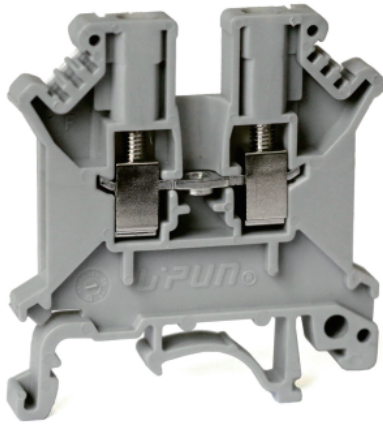


Screw clamping terminal block, rated voltage:800V , Max. operating current:24A, connection method : screw connection, number of connections : 2, crimping range : 0.2mm² -4 mm² , AWG : 24-14, thickness:5.2mm, height:46.5mm, color : grey, mounting type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	7.03
Layers	1
Number of connections	2
Rated cross section(mm ²)	4
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	800V
Rated current(A)	24A
Temperature of insulation material	-40℃~+125℃
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	
Certification logo	
Certification logo	CCS
Certification logo	IECE_x
Certification logo	cUL[®] US
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.2-4mm ²
Solid conductors AWG	0.2-4mm ²

Parameter	Data
Stranded conductors(mm ²)	24-12
Stranded conductors AWG	0.2-2.5mm ²
Operating temperature (°C)	24-14
Ambient temperature (storage/transportation) (°C)	-40°C~+105°C
Relative humidity	-25°C~+60°C
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	42.5mm
Thickness(mm)	42.5mm
Height(mm)	46.5mm

Business data

Parameter	Data
End cover-UKJ-G(DUK)2 - 012045-Packing unit (PCS)	100
End cover-UKJ-G(DUK)2 - 012045-NW per piece(g)	2.5
End cover-UKJ-G(DUK)2 - 012045-Width(mm)	42.5mm
End cover-UKJ-G(DUK)2 - 012045-Thickness(mm)	2mm
End cover-UKJ-G(DUK)2 - 012045-Height(mm)	36mm