


Barrier screw terminal block- YBJF5-4S-051049

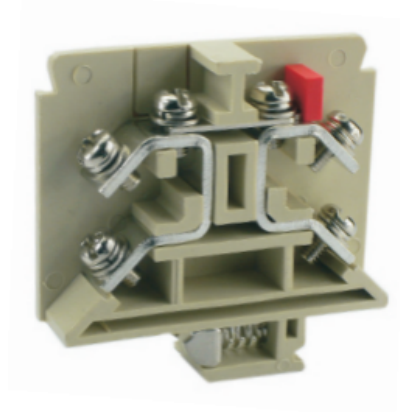

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:24A, connection
method : screw connection , number of
connections : 2 , crimping range : 1.5mm² -2.5
mm² -4mm² , AWG : 16-14-10 , thickness :
12mm , height:52.5mm , color : Beige , mounti
ng
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	2
Number of connections	6
Rated cross section(mm ²)	4
Color	Beige
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE

Technical data

Parameter	Data
-----------	------

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.2
Solid conductors(mm ²)	1.5-2.5-4
Solid conductors AWG	16-14-10
Stranded conductors(mm ²)	1.5-2.5-4
Stranded conductors AWG	16-14-10
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	57.5
Thickness(mm)	12
Height(mm)	52.5