SIEMENS

Лист тех. данных 8US1211-4SS00

версия	
торговая марка изделия	SENTRON
наименование изделия	Адаптер устройства
исполнение изделия	Принадлежности
рабочий ток / при переменном токе / расчетное значение	125 A
рабочее напряжение / при переменном токе / расчетное значение	690 V
пригодность к использованию	NGG, HGG, LGG, 3VA5 без крепежных винтов
Механическая конструкция	
длина	200 mm
расстояние между центрами шин	60 mm
масса нетто	1 000 g

General Product Approval

CSA UL EAC EAC EAC EAC

Declaration of Conformity	Test Certificates		Marine / Shipping		
CE EG-Konf.	Miscellaneous	Special Test Certificate	ABS	PRS	RINA

other

Miscellaneous

Дополнительная информация

© Copyright Siemens

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs
Industry Mall (Online ordering system)
https://mall.industry.siemens.com/mall/ru/ru/Catalog/product?mlfb=8US1211-4SS00
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
https://support.industry.siemens.com/cs/ww/ru/ps/8US1211-4SS00
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4SS00
Tender specifications
http://www.siemens.com/specifications

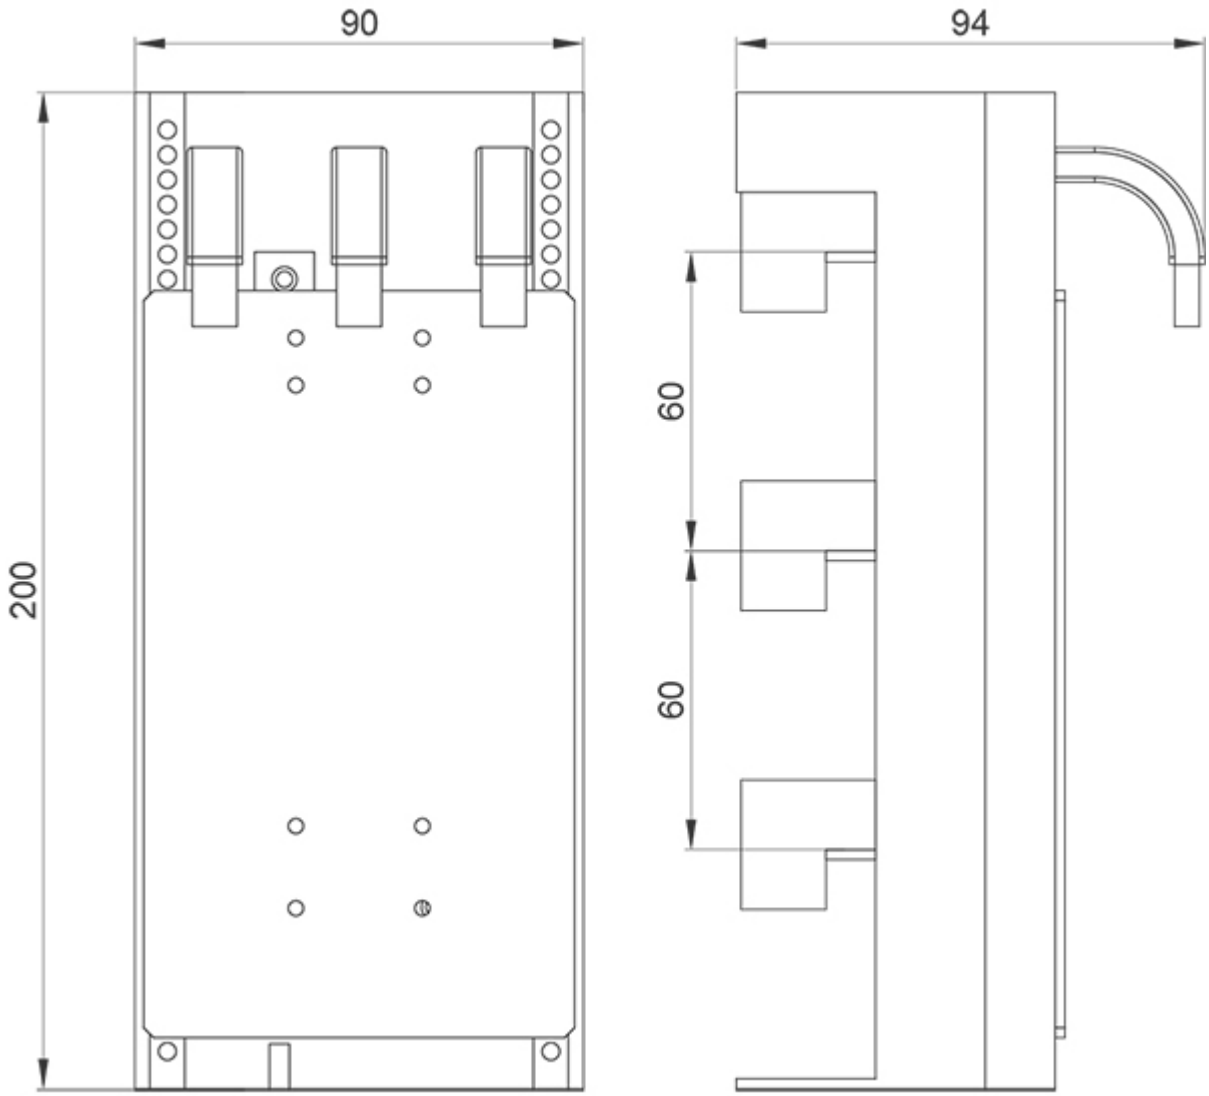

© Copyright Siemens