


Spring-cage connection terminal block-
UJ5-1.5/1 x 2JD - 421031



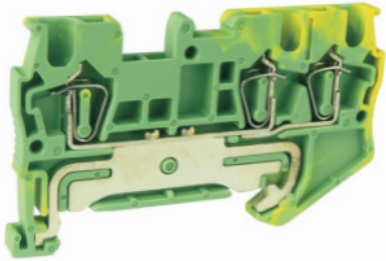

Spring-cage connection terminal block , rated voltage:/, Max. operating current:/, connection method:spring-cage connection, number of connection : 3 , crimping range : 0.14mm² -1.5 mm² , AWG : 28-14 , thickness:4.2mm , height:35.2mm , color : green-yellow , mounting type : TH35-7.5、 TH35-15

Product parameter

| Parameter | Data |
|---------------------------------------|--------------------|
| Packing unit (PCS) | 120 |
| NW per piece(g) | 10.3 |
| Layers | 1 |
| Number of connections | 3 |
| Rated cross section(mm ²) | 1.5 |
| Color | yellow-green |
| Insulation material | PA |
| Flame retardant grade (UL94) | V0 |
| Rated voltage(V) | / |
| Rated current(A) | / |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Above the terminal |

Product certification

| Parameter | Data |
|--------------------|--|
| Certification logo |  |
| Certification logo |  |
| Certification logo | |

| Parameter | Data |
|--------------------|----------------------------|
| | CCS |
| Certification logo | c UL[®] US |
| Certification logo | RoHS |

Technical data

| Parameter | Data |
|---|------------------------|
| Connection Method | Spring-cage connection |
| Stripping length(mm) | 10 |
| Solid conductors(mm ²) | 0.14-1.5 |
| Solid conductors AWG | 28-14 |
| Stranded conductors(mm ²) | 0.14-1.5 |
| Stranded conductors AWG | 28-14 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +60 |
| Relative humidity | 30% ~ 90% |
| Connection in acc. with standard | IEC 60947-7-1 |

Dimension

| Parameter | Data |
|---------------|------|
| Width(mm) | 48.5 |
| Thickness(mm) | 4.2 |
| Height(mm) | 35.2 |