


Spring-cage connection terminal block-  
UJ5-2.5WV/2 × 2JD-421141



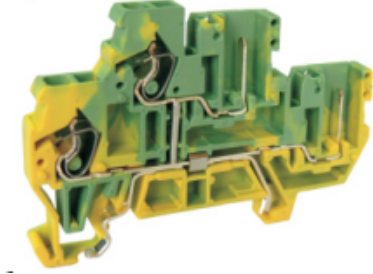

Terminal block,connection methods:spring-cage connection,number of connection:2,crimping range:0.2mm<sup>2</sup> -4mm<sup>2</sup> ,AWG : 24-12 , Thickness:5 mm,Height:46.5mm,color:yellow green,mounting rail:TH35-7.5、 TH35-15.

## Product parameter

Parameter	Data
Layers	2
Number of connections	2
Rated cross section(mm <sup>2</sup> )	2.5
Color	Yellow green
Insulation material	PA
Flame retardant grade	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal
Packing unit(pcs)	60
NW per piece(g)	10.6

## Product certification

Parameter	Data
Certification logo	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	7
Solid conductors(mm <sup>2</sup> )	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm <sup>2</sup> )	0.2-2.5
Stranded conductors AWG	24-12
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +55
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-2

## Dimension

Parameter	Data
Width(mm)	70
Thickness(mm)	5
Height(mm)	46.5