


Screw clamping terminal block- UKHV-2.5JD- 011361

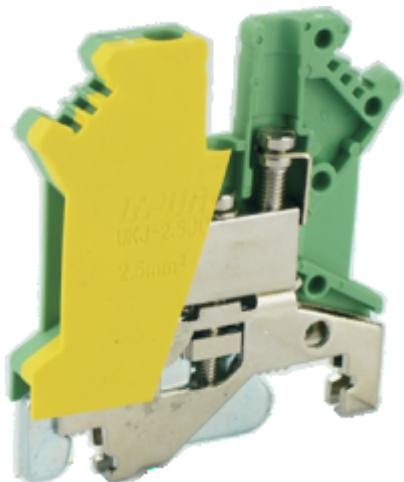

Screw clamping terminal block, connection method : screw connection, number of connections : 3, crimping range : 0.2mm^2 - 4mm^2 , AWG : 24-12, thickness: 5.2mm , height: 46mm , color : yellow-green, mounting type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	17.8
Layers	1
Number of connections	3
Rated cross section(mm^2)	4
Color	yellow-green
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	24-12
Operating temperature (°C)	-40°C~+105°C
Ambient temperature (storage/transportation) (°C)	-25°C~+60°C
Relative humidity	30%~90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	42.5
Thickness(mm)	5.2
Height(mm)	46