


Screw clamping terminal block- UKJ-2.5/1 × 2JD- 011041

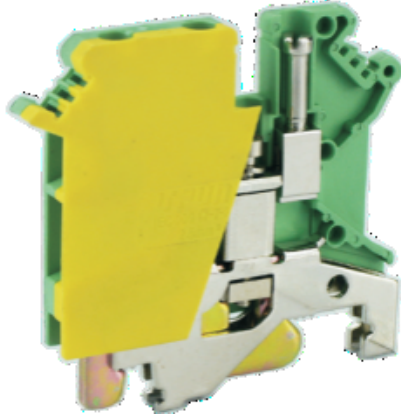

Screw clamping terminal block, connection method : screw connection , number of connections : 3 , crimping range : 0.2mm² -2.5mm² , thickness:5.2mm , height:47mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	80
NW per piece(g)	1.68
Layers	1
Number of connections	3
Rated cross section(mm ²)	2.5
Color	yellow-green
Insulation material	PA
Flame retardant grade (UL94)	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Left and right side of the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	CQC
Certification logo	

Parameter	Data
	CCS
Certification logo	cUL[®] US
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.2-2.5
Stranded conductors(mm ²)	0.2-2.5
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	50.5
Thickness(mm)	5.2
Height(mm)	47