
Spring-cage connection terminal block-UJ2-2.5/2×2 - 441005

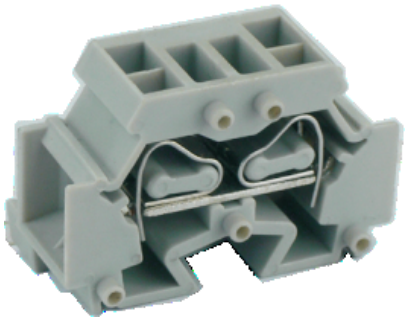

Spring-cage connection terminal block, rated voltage:500V , Max. operating current:24A, connection method：Spring-cage connection, number of connections：2, crimping range：0.08mm ^{2} -2.5mm ^{2} , thickness：10mm , height:18.2mm, color：grey, mounting type：TH35-7.5

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ^{2})	2.5
Color	grey
Insulation material	PA
Flame retardant grade （UL94）	V0
Rated voltage(V)	500
Rated current(A)	24
Temperature of insulation material	-40℃～+125℃
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	8-9
Solid conductors(mm^2)	0.08-2.5
Solid conductors AWG	/
Stranded conductors(mm^2)	0.08-2.5
Stranded conductors AWG	/
Operating temperature（°C）	-40°C～+105°C
Ambient temperature (storage/transportation)（°C）	-25°C～+60°C
Relative humidity	30%～90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	28.2
Thickness(mm)	10
Height(mm)	18.2