


Barrier screw terminal block- JF5-2.5L-051015

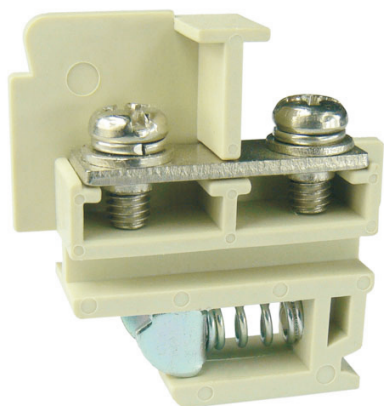

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:24A, connection
method : screw connection , number of
connections : 2 , crimping range : 1mm² -1.5mm² -2.5mm² , AWG : 18-16-14 , thickness :
9.6mm , height:34mm , color : Grey , mounting
type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ²)	2.5
Color	Beige
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	

Technical data

Parameter	Data
c	Screw connection
Screw thread	M4
Stripping length(mm)	8
Tightening torque	1.2
Solid conductors(mm ²)	1.0-1.5-2.5
Solid conductors AWG	18-16-14
Stranded conductors(mm ²)	1.0-1.5-2.5
Stranded conductors AWG	18-16-14
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	35
Thickness(mm)	9.6
Height(mm)	34