


Screw clamping terminal block- UKJ-2.5JD- 011007

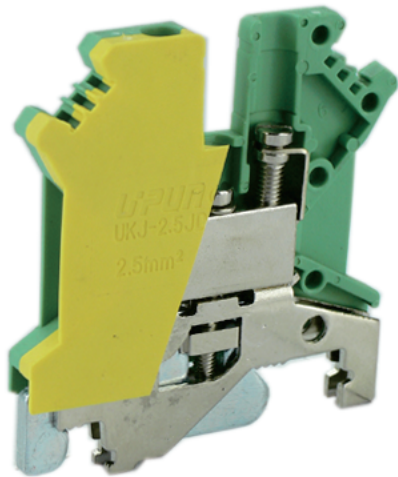

Screw clamping terminal block, connection method : screw connection, number of connections : 2, crimping range : 0.2mm^2 - 4mm^2 , thickness:5.2mm, height:46mm, color : yellow-green, mounting type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	100
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm^2)	4
Color	yellow-green
Insulation material	PA
Flame retardant grade (UL94)	V0
Temperature of insulation material	$-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Wire feed	Left and right side of the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	CQC

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8
Tightening torque	0.6-0.8
Solid conductors(mm ²)	0.2-4
Stranded conductors(mm ²)	0.2-2.5
Operating temperature (°C)	-40°C~+105°C
Ambient temperature (storage/transportation) (°C)	-25°C~+60°C
Relative humidity	30%~90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	42.5mm
Thickness(mm)	5.2mm
Height(mm)	46mm