


Screw clamping terminal block-  
UKJ-35NJD/N-011277

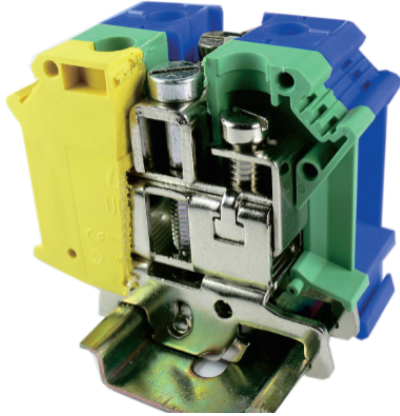

Screw clamping terminal block , connection method : screw connection , number of connections : 4 , crimping range : 0.75mm<sup>2</sup> -35mm<sup>2</sup> , thickness:30.4mm , height:49.8mm , color : yellow-green-blue , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

## Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	4
Rated cross section(mm <sup>2</sup> )	35
Color	yellow-green-blue
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Left and right side of the terminal

## Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M6
Stripping length(mm)	16
Tightening torque	3.2-3.7
Solid conductors(mm <sup>2</sup> )	0.75-35
Operating temperature ( )	-40 ~ +105
Stranded conductors(mm <sup>2</sup> )	0.75-35
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	55
Thickness(mm)	30.4
Height(mm)	49.8