


Spring-cage connection terminal block- UJ5-10 - 421005

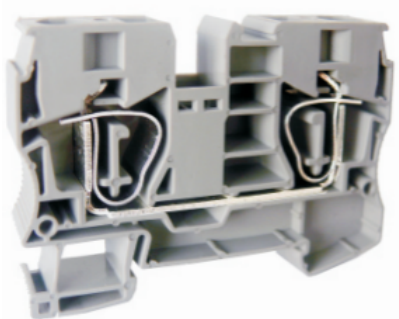


Spring-cage connection terminal block, rated voltage:800V, Max. operating current:65A, connection method:spring-cage connection, number of connection : 2, crimping range : 1.5 mm² -16mm², AWG : 16-6, thickness:10.2 mm, height:49.6mm, color : grey, mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	40
NW per piece(g)	24.7
Layers	1
Number of connections	2
Rated cross section(mm ²)	16
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	800
Rated current(A)	65
Temperature of insulation material	-40°C~+125°C
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	CQC
Certification logo	

Parameter	Data
	
Certification logo	CCS
Certification logo	IECE_x
Certification logo	cUL[®] US
Certification logo	
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	18
Solid conductors(mm ²)	1.5-16
Solid conductors AWG	16-6
Stranded conductors(mm ²)	1.5-10
Stranded conductors AWG	16-6

Parameter	Data
Operating temperature (°C)	-40°C~+105°C
Ambient temperature (storage/transportation) (°C)	-25°C~+60°C
Relative humidity	30%~90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	71.6
Thickness(mm)	10.2
Height(mm)	49.6