


Barrier screw terminal block-  
UBJ2-2.5 / 2 × 2-271011



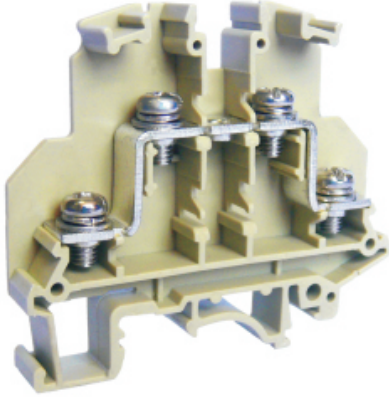

Barrier screw terminal block , rated voltage:660V ,  
Max. operating current:24A, connection  
method : screw connection , number of  
connections : 4 , crimping  
range : 1mm<sup>2</sup> -2.5mm<sup>2</sup> , AWG : 16-14 , thic  
kness : 9.2mm , height:53.5mm , color : Beige ,  
mounting  
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

## Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	2
Number of connections	4
Rated cross section(mm <sup>2</sup> )	2.5
Color	Beige
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	660
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

## Product certification

Parameter	Data
Certification logo	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm <sup>2</sup> )	1-2.5
Solid conductors AWG	16-14
Stranded conductors(mm <sup>2</sup> )	1-2.5
Stranded conductors AWG	16-14
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	62
Thickness(mm)	9.2
Height(mm)	53.5