

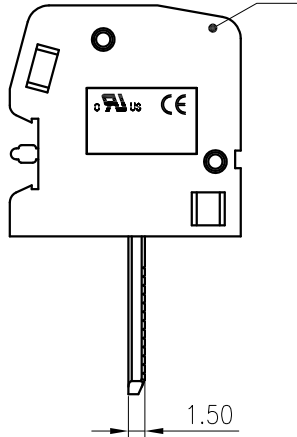
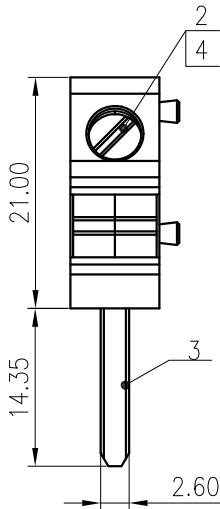
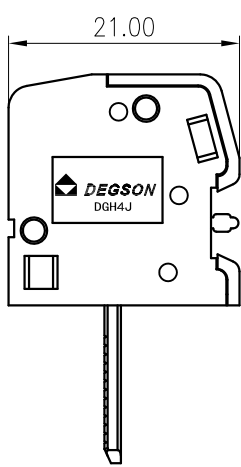






DGH4J-01P-1Y-00A(H)

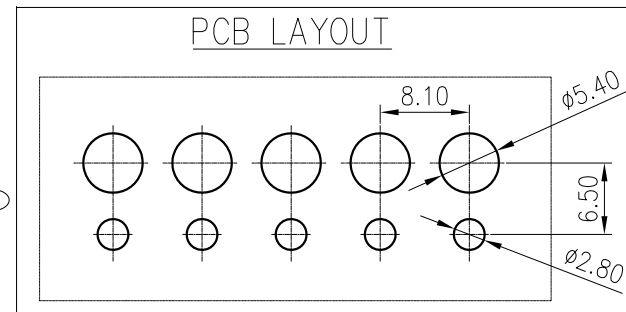

未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

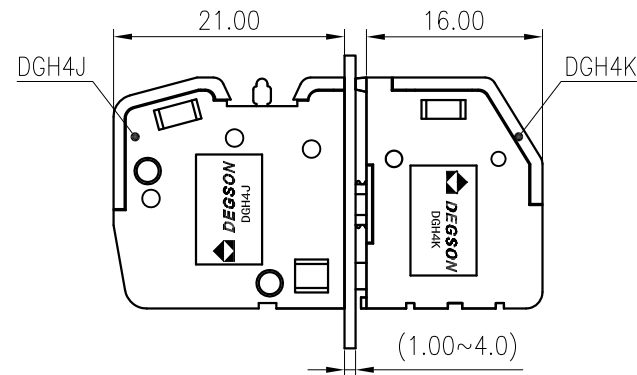

DGH4K-01P-1Y-00A(H)

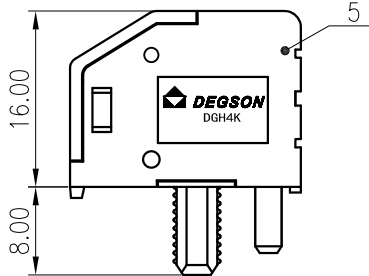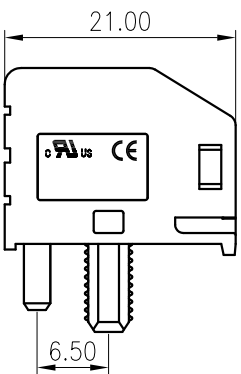

JL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/30	300/30	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	/	400/41	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	/	2.5	/
螺丝扭矩/Torque Tightening(N·m/Lb.in)	M3, 0.5/7.0 (T2)		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm ²)	30~10/0.2~6		
间距/Pitch(mm)/线数范围/Poles	8.10/01P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: / SURFACE: /

MAT NO.: / STATUS: /

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DGH4-01P-1Y-00A(H)

DRFT: NPX 2014.08.09 DRAWING NO.: DGH4-C01 REV: T3

TYPE: CUSTOMER DRAWING SCALE: 1.5:1 SHEET: 1/1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	ECN	DESCRIPTION	DRFT	DATE
5	Housing2	PA66	UL94V-0					
4	Cage	Copper alloy	M3/Ni Plated					
3	Current Carrier	Copper alloy	Sn Plated	(T3)		Updata drawing	CenX	2021.05.20
2	Screw	Copper alloy	M3/Sn Plated	(T2)	18-0214	Modify UL torque	CMZ	2018.07.09
1	Housing1	PA66	UL94V-0	(T1)	18-0148	Updata drawing	NPX	2018.05.21

APPD:	CHKD:	DRFT:
ZhuWM 2021.07.14	CaoLB 2021.07.14	NPX 2014.08.09

Transfer or duplication of this document as well as the utilization or communication of its contents are prohibited unless explicit authorization is granted. Violations will be liable for compensation. All rights reserved for patent, utility, model or designs registrations. 除非给予明确授权，否则禁止转让、复制、利用、交流本文件的内容。侵犯者须承担赔偿责任。未经许可擅自对外泄露者将承担法律责任。