


Spring-cage connection terminal block- UJ5-1.5/1×2 - 421027

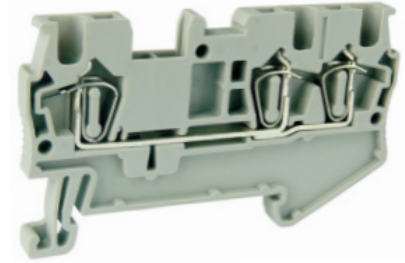

Spring-cage connection terminal block, rated voltage:500V, Max. operating current:17.5A, connection method:spring-cage connection, number of connection : 3, crimping range : 0.14 mm² -1.5mm², AWG : 28-14, thickness:4.2 mm, height:35.2mm, color : grey, mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	3
Rated cross section(mm ²)	5
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	500
Rated current(A)	17.5
Temperature of insulation material	-40℃~+125℃
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	CCS
Certification logo	IECEX
Certification logo	
Certification logo	
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	10
Solid conductors(mm ²)	0.14-1.5
Solid conductors AWG	28-14
Stranded conductors(mm ²)	0.14-1.5
Stranded conductors AWG	28-14

Parameter	Data
Operating temperature (°C)	-40°C～+105°C
Ambient temperature (storage/transportation) (°C)	-25°C～+60°C
Relative humidity	30%～90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	60.4
Thickness(mm)	4.2
Height(mm)	35.2