


Barrier screw terminal block- UTD-200 / 2P- 391154

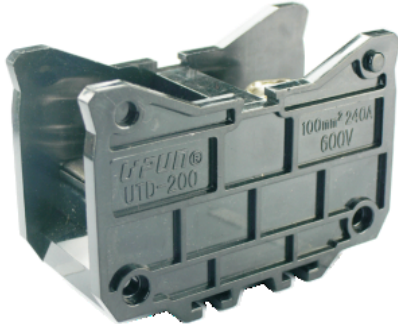

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:240A, connection
method : screw connection , number of
connections : 8 , crimping
range : 60mm² -100mm² , AWG : 1/0-4/0 , t
hickness : 108mm , height:62mm , color : Black
, mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	8
Rated cross section(mm ²)	100
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	240
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	CQC
Certification logo	

Parameter	Data
	
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M10 × 20 (Cross-groove bolts)
Stripping length(mm)	/
Tightening torque	15-20
Solid conductors(mm ²)	60-100
Solid conductors AWG	1/0-4/0
Stranded conductors(mm ²)	60-100
Stranded conductors AWG	1/0-4/0
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	87
Thickness(mm)	108
Height(mm)	62