


Barrier screw terminal block- UTD-20SK-391015

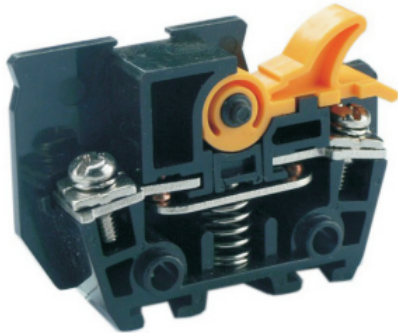

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:20A, connection
method : screw connection , number of
connections : 2 , crimping
range : 1.25mm² -5.5mm² , AWG : 16-10 , t
hickness : 12.5mm , height:40mm , color : Black
, mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ²)	2.5
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	20
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4 × 10
Stripping length(mm)	/
Tightening torque	1.4-1.8
Solid conductors(mm ²)	1.25-5.5
Solid conductors AWG	16-10
Stranded conductors(mm ²)	1.25-5.5
Stranded conductors AWG	16-10
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	59
Thickness(mm)	12.5
Height(mm)	40