
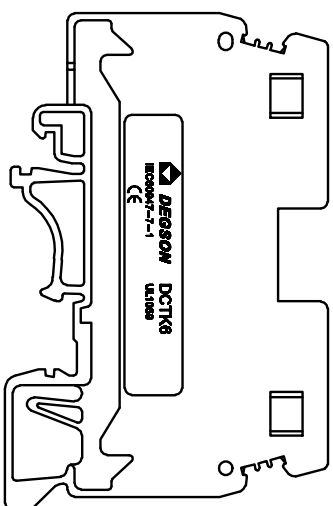
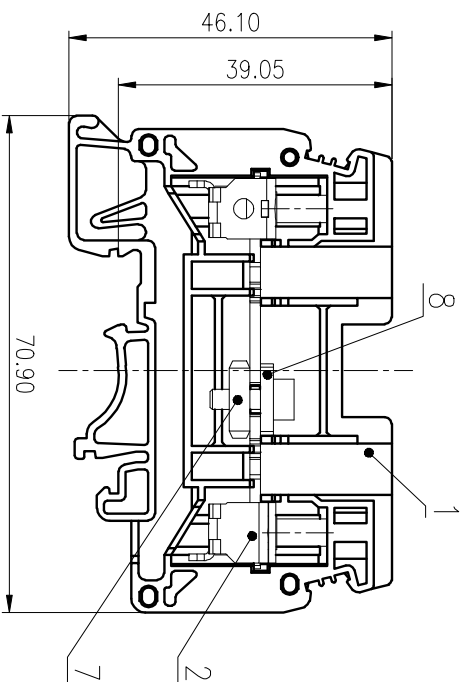


未注公差/General Tolerances(mm)	0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	
	~	~	~	~	~	~	~	~	~	~	~	~	~	0.1/10
	3	6	10	18	30	50	80	120	180	250	315	400	500	
F0.12 F0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50		±Z

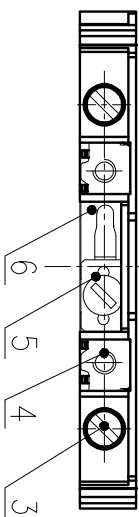

8	Cage-3	Steel	Zn Plated
7	Cage-2	Copper alloy	Sn Plated
6	Current carrier-1	Copper	Sn Plated
5	Screw-2	Steel	M3\Zn Plated
4	Current carrier-1	Copper	Sn Plated
3	Screw-1	Steel	M4\Zn Plated
2	Cage-1	Steel	Zn Plated
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
1			

REV	ECN	DESCRIPTION	DRAFT	DATE

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	LI GL 2020.05.23
CHKD:	Moo J 2020.05.23
DRT:Wmg LX	2020.05.23

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/45	/	/
IEC 标准/IEC Standard:	/	/	/
过压类别/Overvoltage Category/特类等	III/3	/	/
级/Pollution Degree	/	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	630/41	/	/
额定脉冲电压(kV)/Rate Impulse Voltage(kV)	6.0	/	/
额定扭矩/Torque Tightening(N.m/Lb.in)	M4, 1.2/10.53	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.5~10/20~8	/	/
厚度/Pitch(mm)	6.0	/	/
剥线长度/Stripping length(mm)	12	/	/
使用温度范围/Operating temperature(°C)	-40~+105	/	/
符合环保要求/Conform to RoHS	Yes	/	/
标准颜色编号/Standard color number:	/	/	/
PANTONE / RAL	/	/	/

MATERIAL:	/	SURFACE: /
NAME:	DCTK6-01P-1Y-00A(H)	
DRAWING NO.:	DCTK6-C01	SCALE: 1:1
TYPE:	CUSTOMER DRAWING	SHEET 1/1

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
宁波高松电子有限公司