


Spring-cage connection terminal block- UJ5-2.5/2-2 - 421022

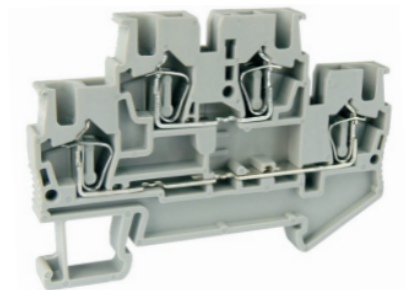

Spring-cage connection terminal block , rated voltage:500V, Max. operating current:26A, connection method:spring-cage connection, number of connection : 4 , crimping range : 0.2 mm² -4mm² , AWG : 28-12 , thickness:5.2mm , height:45.8mm , color : grey , mounting type : TH35-7.5、TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	10.2
Layers	2
Number of connections	4
Rated cross section(mm ²)	4
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	500
Rated current(A)	26
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	CQC
Certification logo	

Parameter	Data
	
Certification logo	CCS
Certification logo	IECE _x
Certification logo	c  [®] US
Certification logo	 INMETRO
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	10
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	28-12
Stranded conductors(mm ²)	0.2-2.5
Stranded conductors AWG	28-12
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	67.5
Thickness(mm)	5.2
Height(mm)	45.8