


Push-in terminal blocks-UJ6-4/2-2JD - 421497

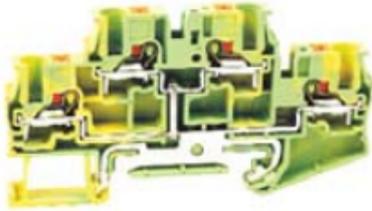

Terminal block, connection methods: circlip connection, number of connection: 4, crimping range: 0.2mm² -4mm² , AWG : 14-10 , thickness 6.2mm, height 35.2mm, color: yellow green, mounting rail: TH35-7.5、 TH35-15.

Product parameter

| Parameter | Data |
|---------------------------------------|--------------------|
| Packing unit(pcs) | 40 |
| NW per piece(g) | 19.3 |
| Layers | 2 |
| Number of connections | 4 |
| Rated cross section(mm ²) | 4 |
| Color | yellow green |
| Insulation material | PA |
| Flame retardant grade | V0 |
| Rated voltage(V) | / |
| Rated current(A) | / |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Above the terminal |

Product certification

| Parameter | Data |
|--------------------|--|
| Certification logo |  |
| Certification logo |  |
| Certification logo | |

| Parameter | Data |
|-----------|-------------|
| | RoHS |

Technical data

| Parameter | Data |
|---|--------------------|
| Connection Method | Push in connection |
| Stripping length(mm) | 13 |
| Solid conductors(mm ²) | 0.2-4 |
| Solid conductors AWG | 14-10 |
| Stranded conductors(mm ²) | 0.2-2.5 |
| Stranded conductors AWG | 14-10 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +55 |
| Relative humidity | 30% ~ 90% |
| Connection in acc. with standard | IEC 60947-7-1 |

Dimension

| Parameter | Data |
|---------------|------|
| Width(mm) | 83.6 |
| Thickness(mm) | 5.2 |
| Height(mm) | 45.8 |