


Barrier screw terminal block- UTD-200I / 8 × 10-391358

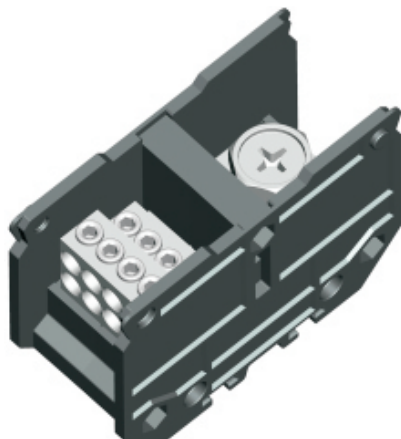

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:240A, connection
method : screw connection , number of
connections : 9 , crimping
range : 60mm² -100mm² , AWG : 1/0-4/0 , t
hickness : 36 × N+30mm , height:58mm , color
: Black , mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	9
Rated cross section(mm ²)	100
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	240
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M10 × 20 (Cross-groove bolts)
Stripping length(mm)	/
Tightening torque	15-20
Solid conductors(mm ²)	60-100
Solid conductors AWG	1/0-4/0
Stranded conductors(mm ²)	4-16
Stranded conductors AWG	1/0-4/0
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	82
Thickness(mm)	36 × N+30
Height(mm)	58