


Screw clamping terminal block- UKJ-50-011013

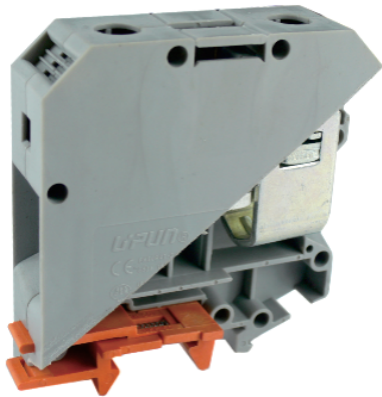


Screw clamping terminal block, rated voltage:1000V , Max. operating current:150A, connection method : screw connection, number of connections : 2, crimping range : 16mm² -50mm², thickness:20mm, height:76mm, color : grey, mounting type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	10
NW per piece(g)	1.19
Layers	1
Number of connections	2
Rated cross section(mm ²)	50
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	1000
Rated current(A)	150
Temperature of insulation material	-40°C~+125°C
Wire feed	Left and right side of the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	
Certification logo	
Certification logo	CCS
Certification logo	IECE_x
Certification logo	cUL[®] US
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	
Screw thread	
Stripping length(mm)	
Tightening torque	
Solid conductors(mm ²)	
Stranded conductors(mm ²)	

Parameter	Data
Operating temperature (°C)	-40°C～+105°C
Ambient temperature (storage/transportation) (°C)	-25°C～+60°C
Relative humidity	30%～90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	71
Thickness(mm)	20
Height(mm)	76