


Screw clamping terminal block- UKHV-4 / 2-2L- 011438

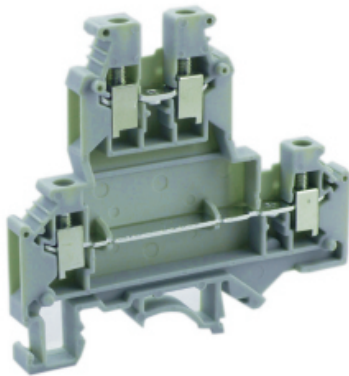

Screw clamping terminal block , rated voltage:1000V , Max. operating current:32A, connection method : screw connection , number of connections : 4 , crimping range : 0.2mm² -4mm² , AWG : 24-12, thickness:6.2mm , height:71mm , color : black , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	60
NW per piece(g)	16.4
Layers	2
Number of connections	4
Rated cross section(mm ²)	4
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	1000
Rated current(A)	32
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.2-4
Solid conductors AWG	24-12
Stranded conductors(mm ²)	0.2-4
Stranded conductors AWG	24-12
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	73
Thickness(mm)	6.2
Height(mm)	71