

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

H

H

G

G

F

F

E

E

D

D

C





C

B

B




A

A

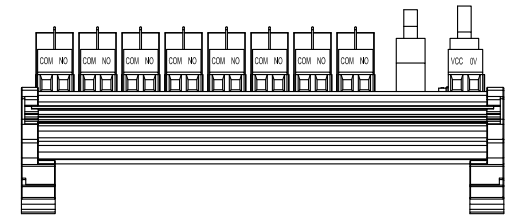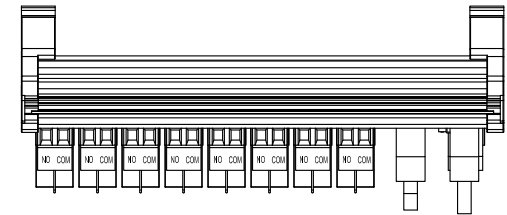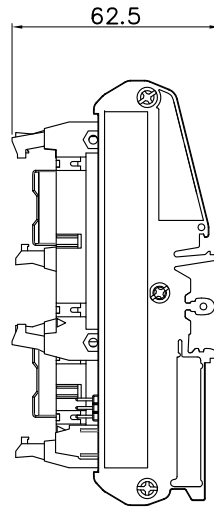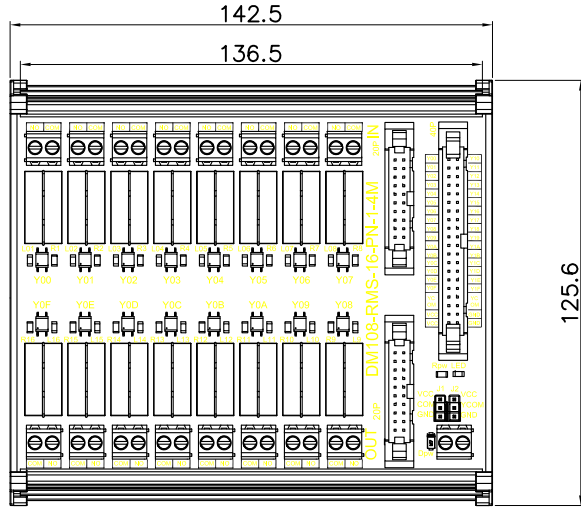

Specifications

Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	10A
contact structure	1NO
Model	8
Signal input method	PNP+NPN
Mechanical life	≥10 ⁷
Electrical life	≥10 ⁵
Temperature range	- 20℃ ~ +70℃
Status Indicator	YES
Connector digits	IDC 20P/IDC 40P
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	IDC 20P
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

PART NO.:	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME: DM108-RMS-16-PN-1-4M-0XA(H)			
CHKD:	TITLE: ASSEMBLY DRAWING			
DRFT:	DRAWING NO.: 30000016		REV	
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET	1/1
 MM (INCH)		SCALE	1:1	