


## Screw clamping terminal block- UKJ-4/2 × 2FDS1- 011323

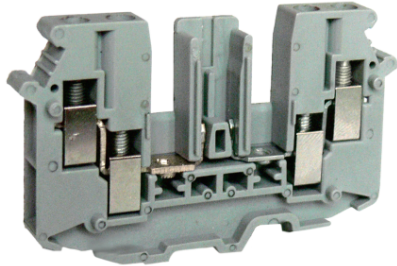

Screw clamping terminal block , rated voltage:400V , Max. operating current:16A, connection method : screw connection , number of connections : 4 , crimping range : 0.2mm<sup>2</sup> -4mm<sup>2</sup> , thickness:6.2mm , height:36.9mm , color : grey , mounting type : TH35-7.5、TH35-15、G32-15、G32-18

## Product parameter

| Parameter                             | Data                       |
|---------------------------------------|----------------------------|
| Packing unit (PCS)                    | /                          |
| NW per piece(g)                       | /                          |
| Layers                                | 1                          |
| Number of connections                 | 4                          |
| Rated cross section(mm <sup>2</sup> ) | 4                          |
| Color                                 | grey                       |
| Insulation material                   | PA                         |
| Flame retardant grade ( UL94 )        | V0                         |
| Rated voltage(V)                      | 400                        |
| Rated current(A)                      | 16                         |
| Temperature of insulation material    | -40 ~ +125                 |
| Wire feed                             | Both sides of the terminal |

## Product certification

| Parameter          | Data |
|--------------------|------|
| Certification logo | CE   |
| Certification logo | RoHS |

## Technical data

| Parameter                                           | Data             |
|-----------------------------------------------------|------------------|
| Connection Method                                   | Screw connection |
| Screw thread                                        | M3               |
| Stripping length(mm)                                | 8mm              |
| Tightening torque                                   | 0.6-0.8Nm        |
| Solid conductors(mm <sup>2</sup> )                  | 0.2-4            |
| Stranded conductors(mm <sup>2</sup> )               | 0.2-4            |
| Operating temperature ( )                           | -40 ~ +105       |
| Ambient temperature<br>(storage/transportation) ( ) | -25 ~ +60        |
| Relative humidity                                   | 30% ~ 90%        |
| Connection in acc. with standard                    | IEC 60947-7-1    |

## Dimension

| Parameter     | Data |
|---------------|------|
| Width(mm)     | 63.5 |
| Thickness(mm) | 6.2  |
| Height(mm)    | 36.9 |