


## Screw clamping terminal block- UKJ-4/2×2SK- 011035

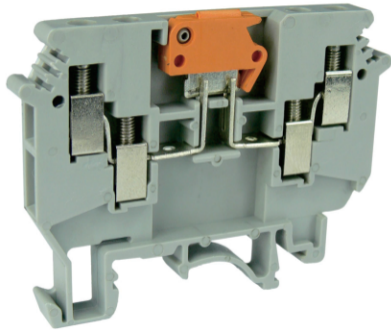

Screw clamping terminal block, rated voltage:690V , Max. operating current:16A, connection method : screw connection, number of connections : 4, crimping range : 0.2mm<sup>2</sup> -6mm<sup>2</sup>, thickness:6.2mm, height:46.2mm, color : grey, mounting type : TH35-7.5、TH35-15、G32-15

## Product parameter

| Parameter                             | Data                       |
|---------------------------------------|----------------------------|
| Packing unit (PCS)                    | 80                         |
| NW per piece(g)                       | 1.33                       |
| Layers                                | 2                          |
| Number of connections                 | 4                          |
| Rated cross section(mm <sup>2</sup> ) | 6                          |
| Color                                 | grey                       |
| Insulation material                   | PA                         |
| Flame retardant grade (UL94)          | V0                         |
| Rated voltage(V)                      | 690                        |
| Rated current(A)                      | 16                         |
| Temperature of insulation material    | -40℃~+125℃                 |
| Wire feed                             | Both sides of the terminal |

## Product certification

| Parameter          | Data |
|--------------------|------|
| Certification logo | CE   |
| Certification logo | RoHS |

## Technical data

| Parameter                                            | Data             |
|------------------------------------------------------|------------------|
| Connection Method                                    | Screw connection |
| Screw thread                                         | M3               |
| Stripping length(mm)                                 | 8mm              |
| Tightening torque                                    | 0.6-0.8Nm        |
| Solid conductors(mm <sup>2</sup> )                   | 0.2-6            |
| Stranded conductors(mm <sup>2</sup> )                | 0.2-4            |
| Operating temperature (°C)                           | -40°C~+105°C     |
| Ambient temperature<br>(storage/transportation) (°C) | -25°C~+60°C      |
| Relative humidity                                    | 30%~90%          |
| Connection in acc. with standard                     | IEC 60947-7-1    |

## Dimension

| Parameter     | Data |
|---------------|------|
| Width(mm)     | 63.5 |
| Thickness(mm) | 6.2  |
| Height(mm)    | 46.2 |