


## Spring-cage connection terminal block- UJ5-35E-421263

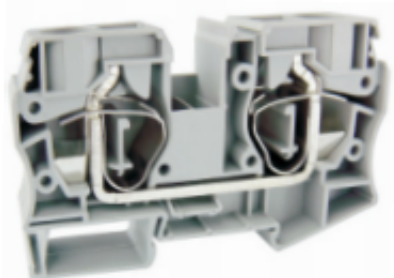

### Product parameter

| Parameter                             | Data |
|---------------------------------------|------|
| Rated cross section(mm <sup>2</sup> ) | 35   |
| Rated voltage(V)                      | 800  |
| Rated current(A)                      | 125  |

### Product certification

| Parameter          | Data                                                                                 |
|--------------------|--------------------------------------------------------------------------------------|
| Certification logo |  |

### Technical data

| Parameter                             | Data   |
|---------------------------------------|--------|
| Stripping length(mm)                  | 25     |
| Solid conductors(mm <sup>2</sup> )    | 2.5-35 |
| Stranded conductors(mm <sup>2</sup> ) | 2.5-35 |

### Dimension

| Parameter     | Data |
|---------------|------|
| Width(mm)     | 100  |
| Thickness(mm) | 16.2 |
| Height(mm)    | 58.6 |