


Barrier screw terminal block- UTD-24S3-391061

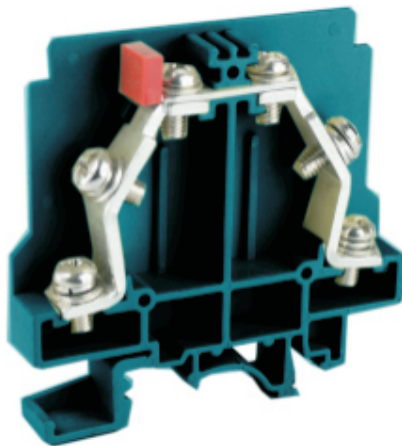

Barrier screw terminal block, rated voltage:660V ,
Max. operating current:24A, connection
method : screw connection, number of
connections : 2, crimping
range : 1mm² -2.5mm² , AWG : 18-14, thic
kness : 9.6mm, height:59mm, color : Black,
mounting
type : TH35-7.5、TH35-15、G32-15、G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	6
Rated cross section(mm ²)	2.5
Color	black
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	24
Temperature of insulation material	-40°C ~ +125°C
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	/
Tightening torque	1.5-1.8
Solid conductors(mm ²)	1-2.5
Solid conductors AWG	18-14
Stranded conductors(mm ²)	1-2.5
Stranded conductors AWG	18-14
Operating temperature (°C)	-40°C~+105°C
Ambient temperature (storage/transportation) (°C)	-25°C~+60°C
Relative humidity	30%~90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	62.2
Thickness(mm)	9.6
Height(mm)	59