


### Barrier screw terminal block- JF5-2.5S3-051033



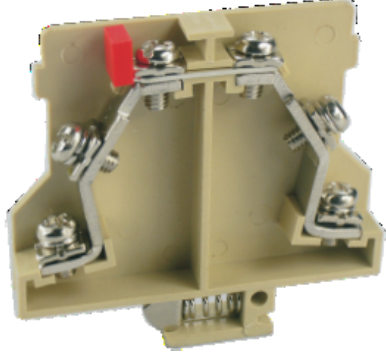

Barrier screw terminal block , rated voltage:660V ,  
Max. operating current:24A, connection  
method : screw connection , number of  
connections : 6 , crimping range : 1.0mm<sup>2</sup> -1.5  
mm<sup>2</sup> -2.5mm<sup>2</sup> , AWG : 18-16-14 , thickness  
: 10mm , height:54mm , color : Beige , mounti  
ng  
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

### Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	6
Rated cross section(mm <sup>2</sup> )	2.5
Color	Beige
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	660
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

### Product certification

Parameter	Data
Certification logo	
Certification logo	

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	8
Tightening torque	1.2
Solid conductors(mm <sup>2</sup> )	1.0-1.5-2.5
Solid conductors AWG	18-16-14
Stranded conductors(mm <sup>2</sup> )	1.0-1.5-2.5
Stranded conductors AWG	18-16-14
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	60
Thickness(mm)	10
Height(mm)	54