


Barrier screw terminal block-  
UBJ2-2.5RDX-271017

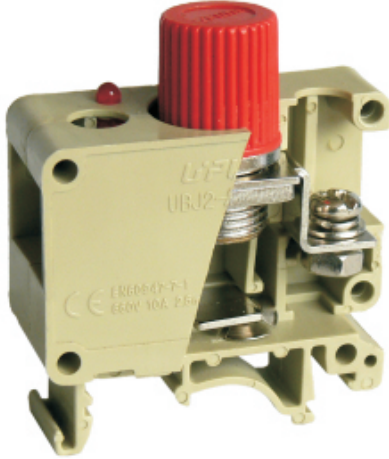


Barrier screw terminal block , rated voltage:250V ,  
Max. operating current:10A, connection  
method : screw connection , number of  
connections : 2 , crimping  
range : 1mm<sup>2</sup> -2.5mm<sup>2</sup> , AWG : 16-14 , thick  
kness : 19.6mm , height:52mm , color : Beige ,  
mounting  
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	2.5
Color	Beig
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	250
Rated current(A)	10A
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm <sup>2</sup> )	1-2.5
Solid conductors AWG	16-14
Stranded conductors(mm <sup>2</sup> )	1-2.5
Stranded conductors AWG	16-14
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	46
Thickness(mm)	19.6
Height(mm)	52