


Barrier screw terminal block- UBJ2-2.5-271003

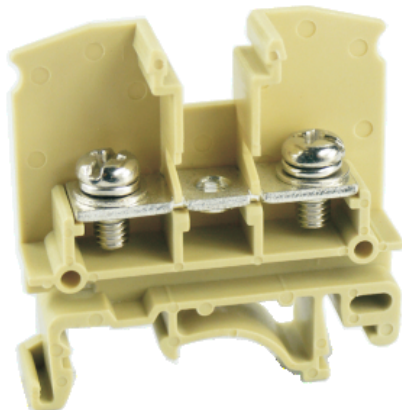

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:24A, connection
method : screw connection , number of
connections : 2 , crimping
range : 1mm² -2.5mm² , AWG : 16-14 , thick
ness : 9.2mm , height:40mm , color : Beige ,
mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ²)	2.5
Color	Beige
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	660
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side
Connection Method	Screw connection

Product certification

Parameter	Data
Certification logo	CE
Certification logo	

Parameter	Data
	

Technical data

Parameter	Data
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm ²)	1-2.5
Solid conductors AWG	16-14
Stranded conductors(mm ²)	1-2.5
Stranded conductors AWG	16-14
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	41
Thickness(mm)	9.2
Height(mm)	40