


Spring-cage connection terminal block- UJ5-6CW/RDX-421145

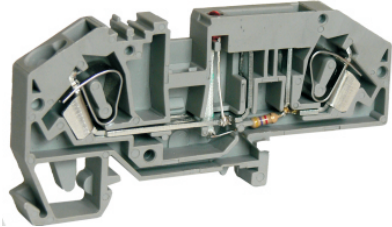

Spring-cage connection terminal block , rated voltage:400(rated voltage depends on LED indicator light), Max. operating current:30 (rated current depends on fuse) , connection method:spring-cage connection, number of connection : 2 , crimping range : 0.5mm² -10mm² , AWG : 24-8 , thickness:8mm , height:39.2mm , color : grey , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	46
NW per piece(g)	18
Layers	1
Number of connections	2
Rated cross section(mm ²)	6
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	400(rated voltage depends on LED indicator light)
Rated current(A)	30 (rated current depends on fuse)
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	CE
Certification logo	RoHS

Technical data

Parameter	Data
-----------	------

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	13
Solid conductors(mm ²)	0.5-10
Solid conductors AWG	20-8
Stranded conductors(mm ²)	0.5-6
Stranded conductors AWG	20-8
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	84.5
Thickness(mm)	8
Height(mm)	39.2