


Barrier screw terminal block- UBJ2-1.5RDX-271015

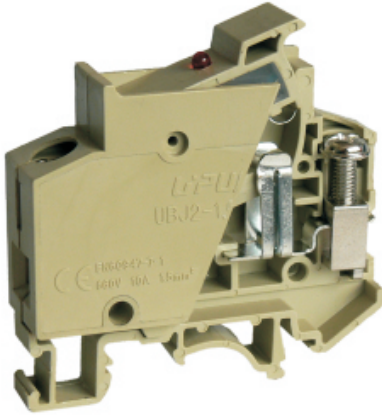


Barrier screw terminal block , rated voltage:250V (rated voltage depends on the LED indicator lamp) , Max. operating current:10A (Rated current depends on the fuse) , connection method : screw connection , number of connections : 2 , crimping range : 0.75mm² -1.5mm² , AWG : 18-16 , thickness : 13.8mm , height:51.5mm , color : Beige , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	2
Rated cross section(mm ²)	1.5
Color	Beige
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	250 (rated voltage depends on the LED indicator lamp)
Rated current(A)	10A (Rated current depends on the fuse)
Temperature of insulation material	-40 ~ +125
Wire feed	Terminal side

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm ²)	0.75-1.5
Solid conductors AWG	18-16
Stranded conductors(mm ²)	0.75-1.5
Stranded conductors AWG	18-16
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	58.4
Thickness(mm)	13.8
Height(mm)	51.5