
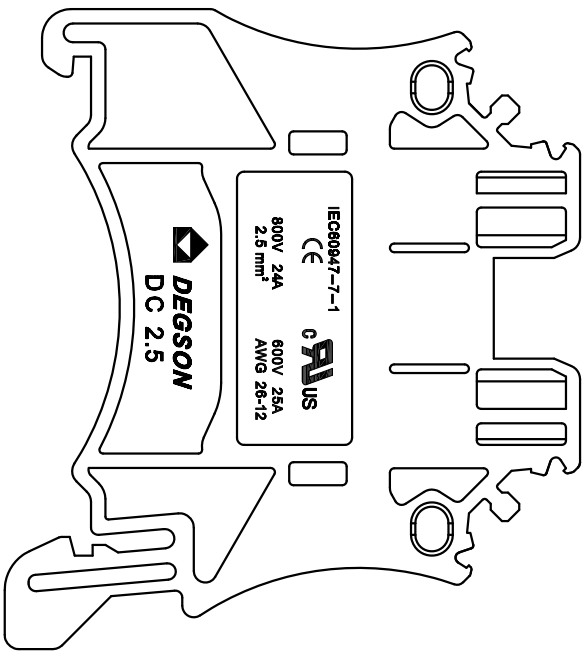

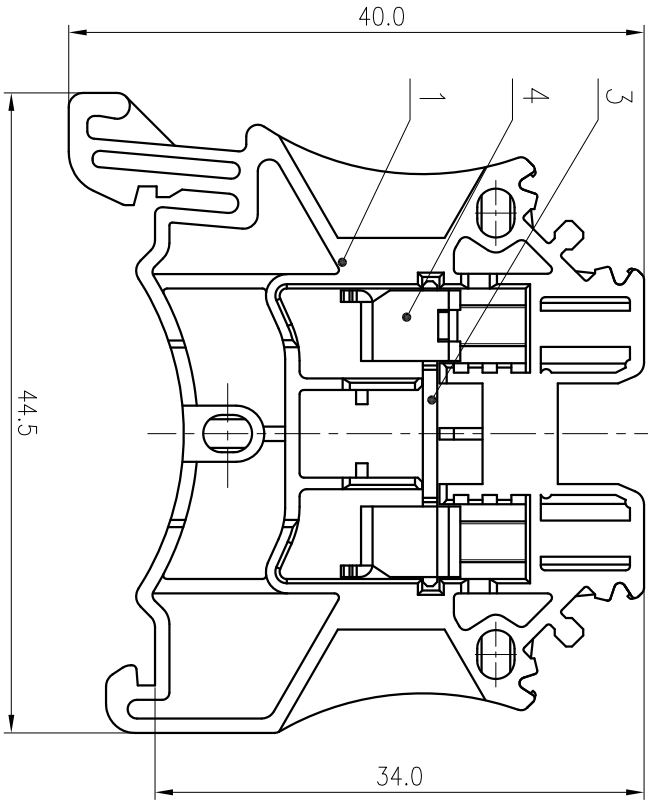


公差/General Tolerances(mm)		公差/General Tolerances(mm)	
0	>3	>6	>10
~	~	~	~
3	6	10	18
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±1.05	±1.35	±1.60	±2.20
±2.50	±4.00	±5.00	±7.00
±10	±15	±20	±30

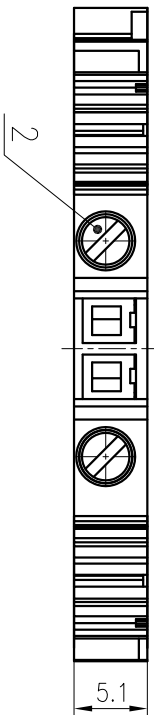

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/25	600/25	600/5
IEC 标准/IEC Standard:	III/3	III/2	II/2
过压类别/Overvoltage Category/污染等级/Pollution Degree	800/24	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	8.0	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	M2.5, 0.4/3.54	/	/
拧紧扭矩/Torque Tightening(N·m/Lbin)	0.2~2.5/26~12	/	/
绞合范围(硬导线软线)/Wire Range(rigid and flexible)(mm²/AWG)	5.1	/	/
间距/Pitch(mm)	8-9	/	/
剥线长度/Stripping length(mm)	-40~+105	/	/
使用温度范围/Operating Temperature(°C)	Yes	/	/
符合RoHS环保要求/Conform to RoHS			

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.05.27

CHKD: Mgo J 2020.05.27

DRT: Ding 2015.10.24

SURFACE: /

DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD

DC2.5-01P-1Y-00A(H)

DRAWING NO.: DC2.5-C01

TYPE: CUSTOMER DRAWING

SCALE: 2:1 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cage	Steel	Zn Plated
3	Current Carrier	Copper	Sn Plated
2	Screw	Steel	Zn Plated
1	Housing	PA66	UL94 V-0

REV	ECN	DESCRIPTION	DRT	DATE