


尺寸公差(mm)		公差	
0	>30	>60	>100
~	~	~	~
30	60	100	150
~	~	~	~
>150	>150	>150	>150
±0.20	±0.30	±0.50	±0.70
±1.00	±1.00	±1.00	±1.00

Rated current	10A
Rated voltage	300V
Coil/Contact dielectric voltage	2500V/S
Dielectric voltage between contact	2500V/S
Screw torque	1.0Nm
External connection wire	20-14/0.5-2.5W
Ambient temperature	G/mm ²
Key controlled symbol	-40~+65℃
Conform to RoHS	*

Printing for laser marking/printing content is clear ,no broken line/rect
Seal literal reference according to the foot position in the drawing

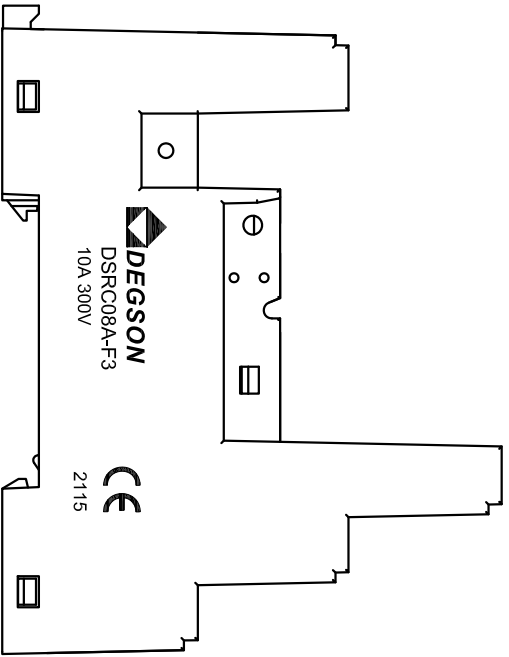

REV	ECN	DESCRIPTION	DRAFT	DATE

1	DSRC08A-F3-00A(H)-N	300190000135	1		
MATERIAL:		SURFACE: /			
NO.		DESCRIPTION			
MATERIAL NO.		QTY			
MATERIAL		NOTES			
MATERIAL: /					
MAT. NO.: 300200000064		Description:			
STATUS: /		NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:		DSRC08A-F3-00A(H)			
CHKD:		DRAWING NO.: 30000372			
DRAFT:		REV			
SIZE: A4		TYPE: PRODUCT DRAWING		SCALE: 1:1	
DRAWING NO.: 30000372		REV		TO-1	
TYPE: PRODUCT DRAWING		SCALE: 1:1		SHEET	
DRAWING NO.: 30000372		REV		TO-1	
TYPE: PRODUCT DRAWING		SCALE: 1:1		SHEET	
DRAWING NO.: 30000372		REV		TO-1	
TYPE: PRODUCT DRAWING		SCALE: 1:1		SHEET	